κ a ł·ǘŜŃƛł·fY

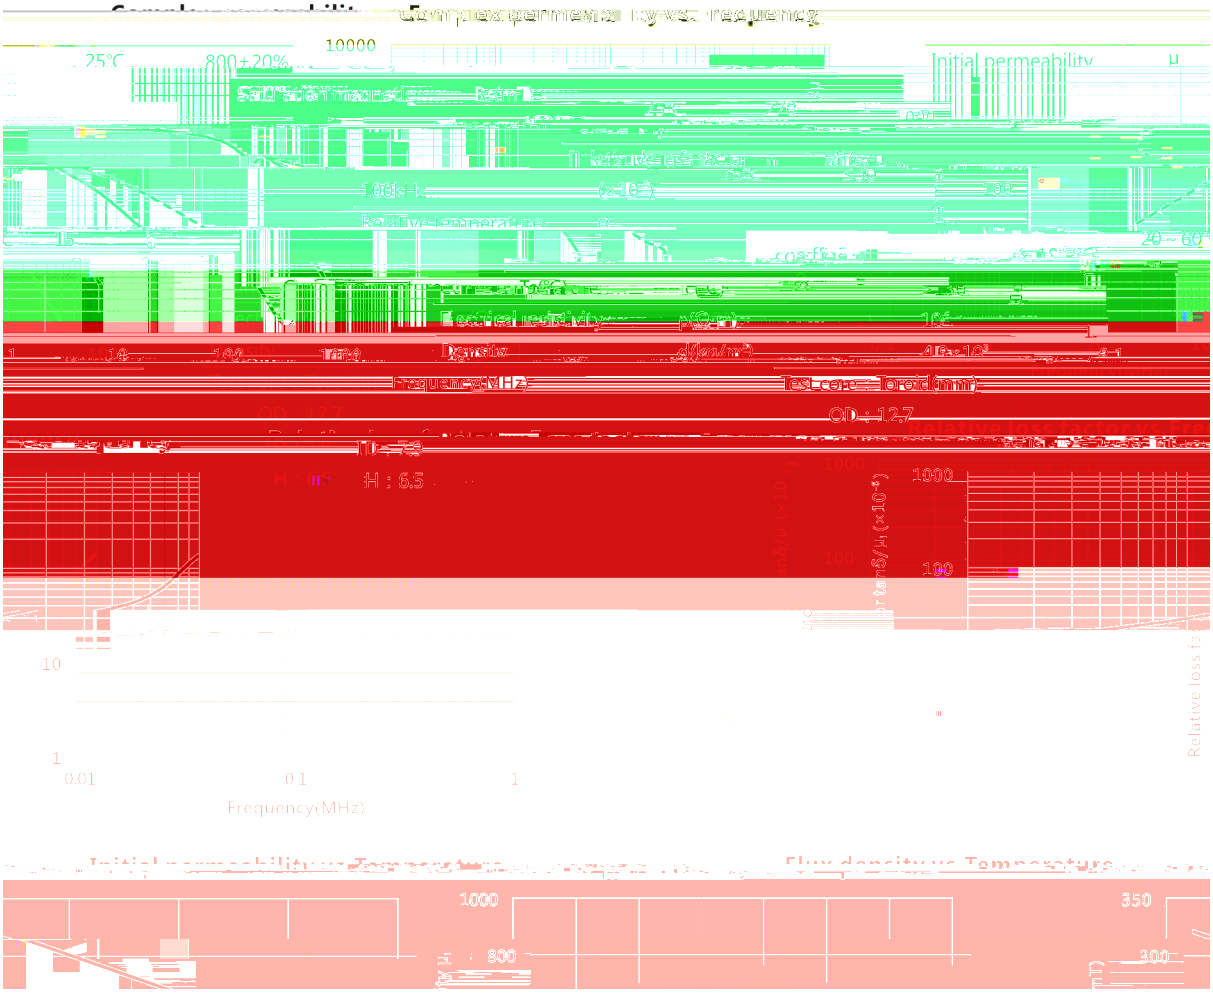
Complex permeability vs. Frequency
10000
25°C
800±20%
Initial permeability
μ
Saturation magnetic
Relative
100kHz
Relative temperature
Electrical resistivity
Density
Frequency(MHz)
Test core : Toroid(mm)
OD : 12.7
H : 6.5
Relative loss factor vs. Flux
1000
100
10
1
0.01
0.1
1
Frequency(MHz)
Initial permeability vs. Temperature
Flux density vs. Temperature
1000
800
350
300